

Areas for Zone Boundary Blocks	
Block	Acres
38	914.550000
82	1206.580000
126	1498.200000
170	1789.410000
214	2080.220000
258	2370.630000
302	2660.640000
346	2950.240000
390	3239.430000
434	3528.220000
478	3816.610000
522	4104.600000
566	4392.180000
610	4679.360000
654	4966.140000
698	5252.510000
742	5538.470000
786	5749.160000
787	74.870000
831	349.190000
875	633.940000
919	918.280000
963	1202.210000
1007	1485.740000



All blocks are based on the Universal Transverse Mercator Grid System, Zone 16, with X origin = 1,640,416.67 feet. (500,000 international meters), at 87° West Longitude, and Y origin = 0 feet at 0° Latitude. The boundaries of the regular blocks are 15,840 feet on a side and contain 5,760 acres.

The grid distance of the irregular blocks along the zone boundary are defined in the Minerals Management Service Technical Information Management System (TIMS).

This revised diagram supersedes protraction diagram FLORIDA MIDDLE GROUND NH16-12, revised and approved 10-OCT-1972, revised 01-AUG-1973, and revised 02-DEC-1976.

The coordinate values appearing on this document were derived using North American Datum of 1927.

Copies of these diagrams and other information may be obtained at the appropriate MMS OCS Region, Office of Program Services.

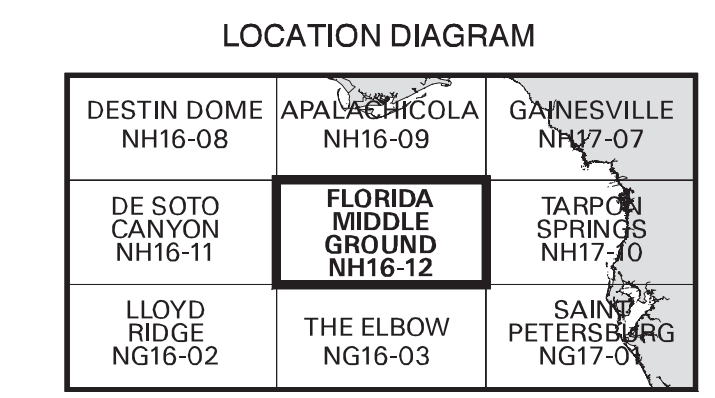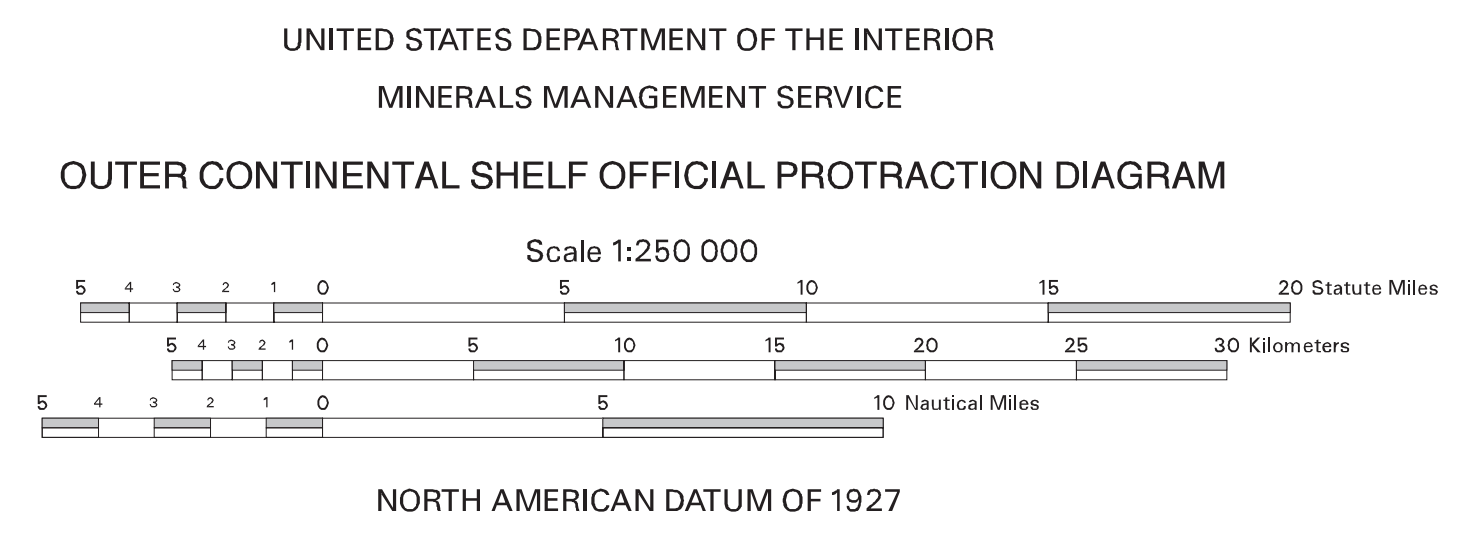

This diagram is prepared in accordance with 30 CFR 256.8

For the Director

*Selma Hammel*

Chief, Leasing Division, Mapping and Boundary Branch  
Denver, Colorado Date 01-SEP-1999

Revised